


Double Acting Function for Single Acting Cylinder - Tank Mounting

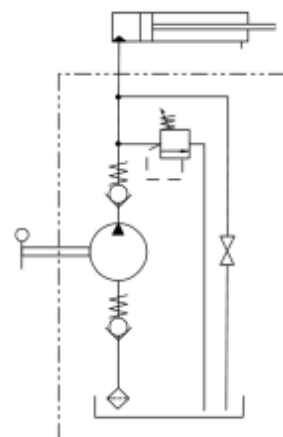

Order Code	Displacement (cm ³)	Max. Pressure (bar)	Optimum Pressure (bar)	Outlet Port	List Each
PM12SVM-Y	12	380	220	G 3/8 (Female)	\$432.00
PM25SVM-Y	25	330	120		\$432.00
PM45SVM-Y	45	280	80		\$480.00

Note:

- Displacement is per cycle. One cycle is extend and retract of the handle.
- Relief Valve factory set to Max. Pressure.
- All Hand Pumps are supplied with an Adjustable Relief Valve, Bellows over piston shaft, Handle, Cork Gasket, SHCS & Spring Washers for mounting to our tank or yours.
- Prices **do not** include a tank. They are sold separately. Refer to [Page 3.06](#).
- When using ST Tanks hand pump can only be mounted with the handle horizontal.
- Hand Pumps can be mounted to your tank with the handle vertical. Ensure you use sealed nuts or thread sealant and take care not to kink and block the Suction Tube.
- If fitting to your tank order the accessories below if required.

P/N	Description	Qty	List Each
STPR-3	Suction Strainer – G 3/8 x 44 Ø	1	\$28.00
STFT-3M-DN10	Barbed Fitting - R 3/8 (BSPT) Male x Ø 10 mm ID Suction Hose	1	\$6.00
STFT-3F-DN10	Barbed Fitting - R 3/8 (BSPT) Female x Ø 10 mm ID Suction Hose Use with P/N HPSS	1	\$6.00
HPSS	Hand Pump Suction Seal Use with P/N STFT-3F-DN10	1	\$5.00
STC-13	Hose Clamp for Ø 10 mm ID Suction Hose	2	\$4.00
STT-10	Suction Hose - Ø 10 mm ID	As Required	(per metre) \$15.00