


Double Acting Function for Single Acting Cylinder - Tankless (Wall Mount)




PM20S

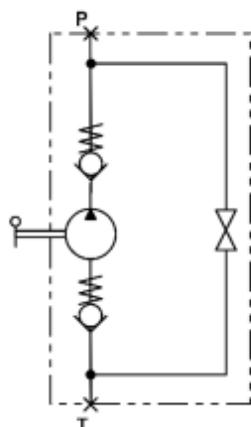

PM20S & PM50S



PM50SE

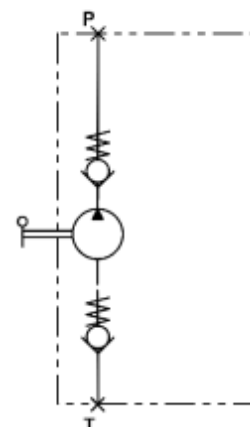

PM20SE & PM50SE

Order Code	Displacement (cm ³)	Max. Pressure (bar)	Optimum Pressure (bar)	Ports (Female)	Release Knob	List Each
PM20S	20	300	225	P = G 3/8 x 1	Yes	\$457.00
				T = G 1/2 x 1		
PM20SE	50	280	80	P = G 3/8 x 2	No	\$443.00
				T = G 1/2 x 1		
PM50S	50	280	80	P = G 1/2 x 1 (Top) G 3/8 x 1 (Side)	Yes	\$457.00
				T = G 1/2 x 1 (End)		
PM50SE	50	280	80	P = G 1/2 x 1 (Top) G 3/8 x 2 (Side)	No	\$443.00
				T = G 1/2 x 1 (End)		

Note:

- Displacement is per cycle. One cycle is extend and retract of the handle.
- All Hand Pumps are supplied with a Bellows over piston shaft and a Handle.
- PM Hand Pumps do not have a Relief Valve.